

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/083831 A1(51) International Patent Classification⁷: G10L 15/14

(21) International Application Number: PCT/GB03/01244

(22) International Filing Date: 24 March 2003 (24.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0207343.5 28 March 2002 (28.03.2002) GB

(71) Applicant (for all designated States except US): QINETIQ LIMITED [GB/GB]; Registered Office, 85 Buckingham Gate, London SW1E 6PD (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): WEBBER, Christopher, John, St. Clair [GB/GB]; QinetiQ Malvern, Malvern Technology Centre, St Andrew Road, Bldg EX Rm 28, Malvern, Worcs WR14 3PS (GB).


(74) Agent: CLARKE, Alan; D/IP QinetiQ Formalities, Cody Technology Park, A4 Building, Room G016, Ively Road, Farnborough., Hampshire GU14 0LX (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GI, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: SYSTEM FOR ESTIMATING PARAMETERS OF A GAUSSIAN MIXTURE MODEL

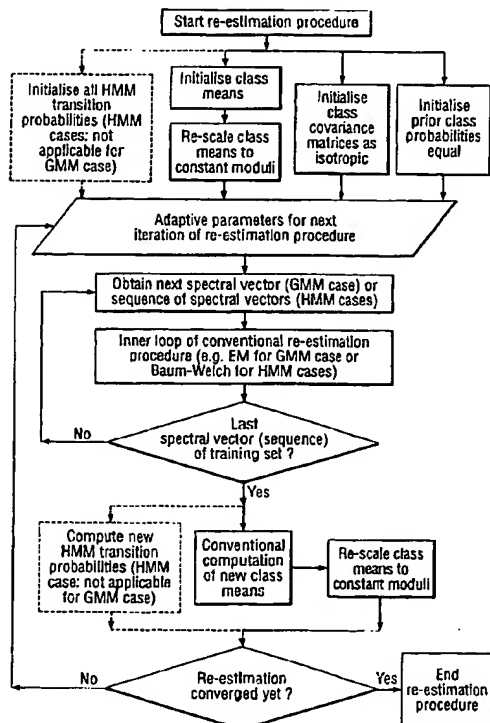

(57) **Abstract:** A signal processing system is disclosed which is implemented using Gaussian Mixture Model (GMM) based Hidden Markov Model (HMM), or a GMM alone, parameters of which are constrained during its optimisation procedure. Also disclosed is a constraint system applied to input vectors representing the input signal to the system. The invention is particularly, but not exclusively, related to speech recognition systems. The invention reduces the tendency, common in prior art systems, to get caught in local minima associated with highly anisotropic Gaussian components - which reduces the recogniser performance - by employing the constraint system as above whereby the anisotropy of such components may be minimised. The invention also covers a method of processing a signal, and a speech recogniser trained according to the method.